



WOLTMAN 65 DR

WOLTMAN PILING & DRILLING RIGS

High pull-up capacity, **Excellent stability and reliability** 250 kNm torque, Tier 4 final (Stage 5) diesel engine


DIESEKO GROUP

W WOLTMAN
PILING & DRILLING RIGS

WOLTMAN 65 DR

Woltman is continuously improving their range of equipment. Developments in relation to emission standards and fuel efficiency might result in different specifications. No rights can be attached to the dimensions and specifications mentioned on this leaflet because they might have changed without further notification. All data is subject printing and conversion errors.

TECHNICAL SPECIFICATIONS

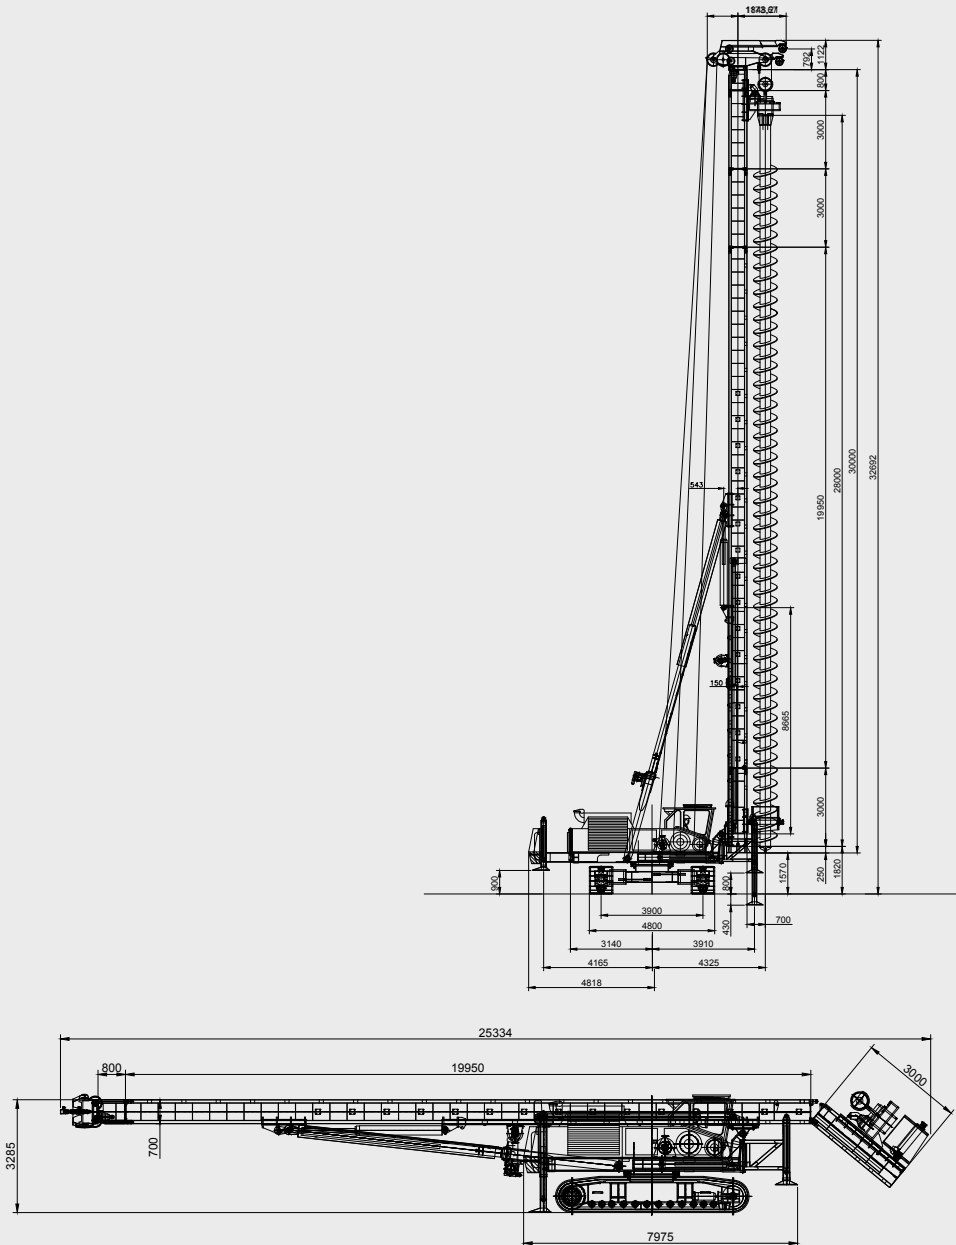

Operational specifications

Recommended Rotary head	PVE	RH-25
Max. torque on leader	kNm	250
Leader length std. (max.)	mtr	25,75 (30,75)
Max. drill depth	mtr	24 (29)
Max. diameter	mm	1.000
Pull-up force	ton	60
Pull-down force	ton	20
Operational weight with RH25	ton	72
Max. oil flow	l/min.	520
Max. pressure	bar	350

Transport weights (excl. counterweight)

Transport weight w/o RH25	ton	62
Transport weight incl. RH25	ton	66
Removable counterweight	ton	6,2

Rig specifications

Engine	Caterpillar	C-13
Engine output	kW 350	HP 475
Hydraulics	Bosch Rexroth	
Hydraulic system	Open loop	