



WOLTMAN 75 DR

WOLTMAN PILING & DRILLING RIGS

Foldable leader with automatic locking
Compactly built machine
Small transport size


DIESEKO GROUP

WOLTMAN
PILING & DRILLING RIGS

WOLTMAN 75 DR

Woltman is continuously improving their range of equipment. Developments in relation to emission standards and fuel efficiency might result in different specifications. No rights can be attached to the dimensions and specifications mentioned on this leaflet because they might have changed without further notification. All data is subject printing and conversion errors.

TECHNICAL SPECIFICATIONS

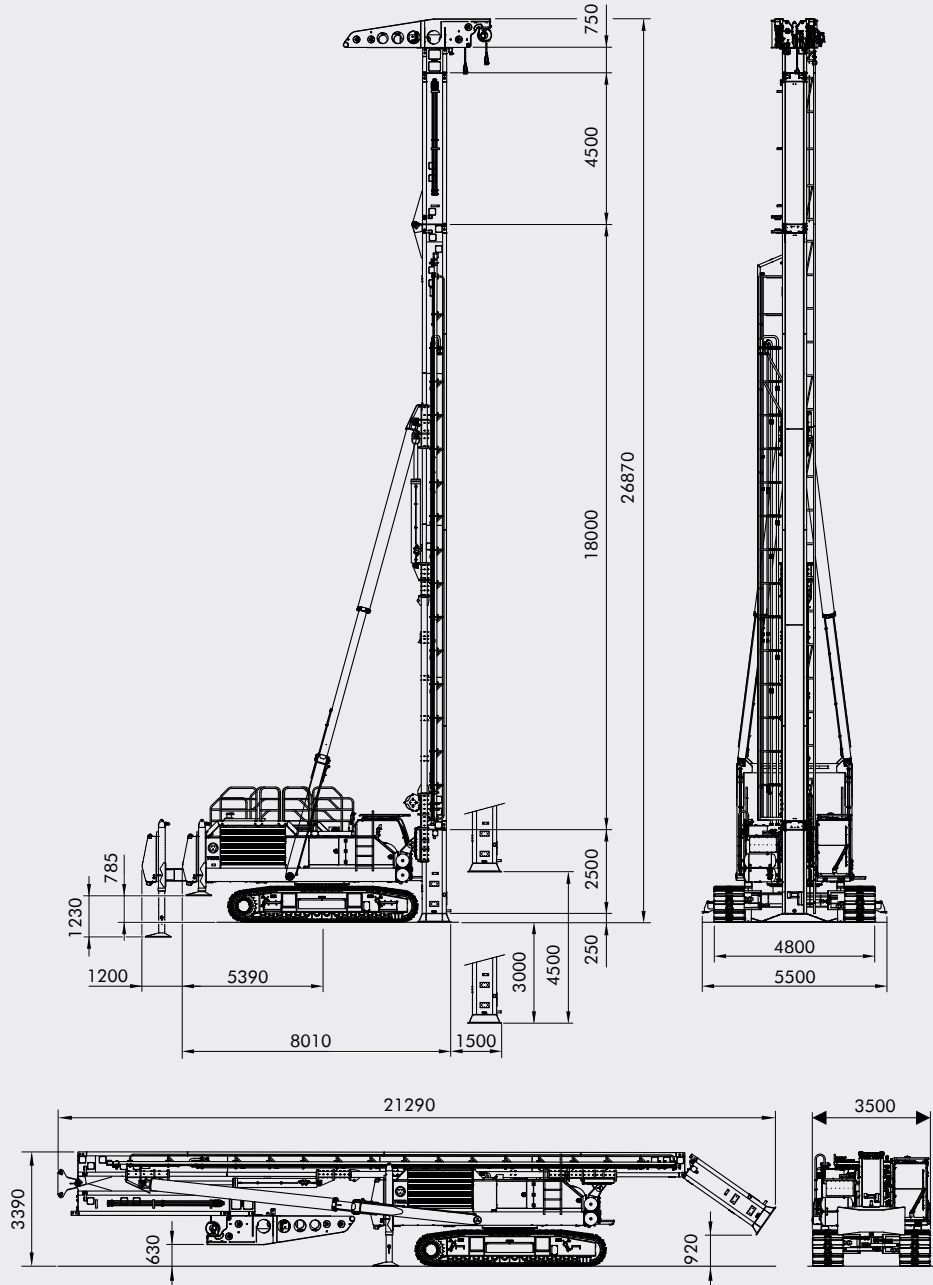

All dimensions are in millimeters

Operational specifications

Recommended Rotary head	PVE	RH-25HS/RH-30
Max. torque on leader	kNm	350
Leader length std (max.)	mtr	26,8 (34)
Max. drill depth	mtr	27 (31)
Max. diameter	mm	1.200
Pull up force	ton	75
Pull down force	ton	25
Operational weight RH-25-HS	ton	102
Max. oil flow	ltr/min	800
Max. pressure	bar	320

Weights

Transport incl. RH & tooling	ton	94
Transport incl. RH & counterweight	ton	81
Transport weight incl. RH-25	ton	74
Transport incl. counterweight	ton	74,5
Transport excl. RH & counterweigh	ton	67

* subject to capacity charts

Woltman Piling and Drilling Rigs B.V. Ambachtsweg 16, 3381 LN Giessenburg, The Netherlands
T +31 (0)184 - 652 044 | www.woltmanrigs.com info@www.woltmanrigs.com

Member of

DIESEKO GROUP